


DS-KB2411-IM
Video Intercom Door Station

Key Features

- Hands-free video intercom communication
- Supports two door stations in the intercom system
- Self-adaptive IR supplement (with photoresistor)
- One-touch calling
- Pinhole camera with 720 x 576 @ 25 fps
- Unlock controlling
- Anti-oxidant aluminium alloy
- Wall mounting supported
- Convenient installation with/without the junction box



Typical Application

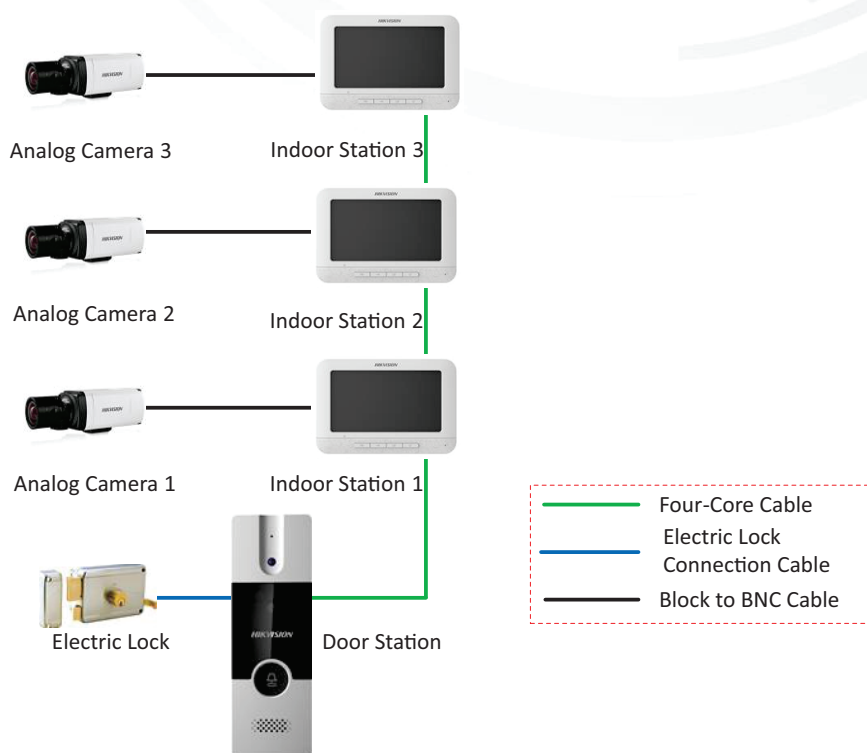


Specifications

Model	DS-KB2411-IM	
Video parameters	Camera	1/4" CMOS
	Resolution	720 × 576
	Video frame rate	PAL: 25 fps
Audio parameters	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio quality	Noise Suppression and Echo Cancellation
Light supplement	Light supplement mode	Photosensitive IR Supplement, IR Range: 2 Meters
Device interfaces	Four-wire interface	1 Four-Wire Interface (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding)
	I/O output	1 Relay Output
General	Material	Aluminum Alloy
	Power consumption	Max. 3W
	Working temperature	-30°C to +60°C (-22°F to 140°F)
	Working humidity	10% to 90%
	Dimensions (L × W × H)	128 mm × 42 mm × 24.8 mm (5.0" × 1.7" × 0.9")

Available Model

DS-KB2411-IM

Appearance and Interfaces

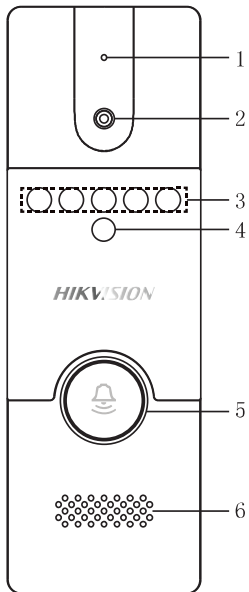

Index	Description
1	Microphone
2	Built-in Camera
3	Supplement Light
4	Photoresistor
5	Call Button
6	Loudspeaker