



Optical Power Meter

APM60

- ◆ 2.5mm universal connector
- ◆ Energy save mode
- ◆ Built in VFL (optional)
- ◆ Reference value storage
- ◆ Power autonomy of 100 hours
- ◆ 850/1300/1310/1490/1550/1625nm
- ◆ One-year warranty and Three-year recommended calibration interval



Standard



Calibration certificate



Packing box

Optional



2.5mm to 1.25mm adapter



NEXT-Generation
Network Measurement

FTTx
Test Solutions



ISO9001



ISO14001:2015

SPECIFICATIONS


Model	APM60T	APM60C
Display Range	1310/1490/1550/1625: +6 ~ -70dBm	1310/1490/1550/1625: +26 ~ -50dBm
	850/1300: +6 ~ -60dBm	850/1300: +26 ~ -40dBm
Accuracy *	± 0.2 dB	
Calibrated Wavelengths	850nm / 1300nm / 1310nm / 1490nm / 1550nm / 1625nm	
Display Resolving Power	0.01dB	
Linearity	± 0.2 dB	
OPM Connector	2.5mm universal	
VFL Connector(Optional)	2.5mm universal	
VFL Output(Optional)	1mW or 10mW, CW and Glint	
LED Light	SOS code output	
Automatic Power Off	No operation in 10 minutes (can be cancelled), Low battery energy	
Battery Charge	Yes	
Battery Life	Above 100 hours (OPM)	
Power Supply	AA * 2 batteries or AC/DC power supply adapter	
Size	105mm * 52mm * 34mm	

*At $20 \pm 3^{\circ}\text{C}$, CW, with FC connector, -10dBm

GENERAL SPECIFICATIONS

Size(H*W*D)	105mm * 52mm * 34mm
Weight	About 100g
Storage Temperature	-20 -- +60 $^{\circ}\text{C}$, < 90%RH
Operating Temperature	-10 -- +50 $^{\circ}\text{C}$, < 90%RH

ORDERING INFORMATION

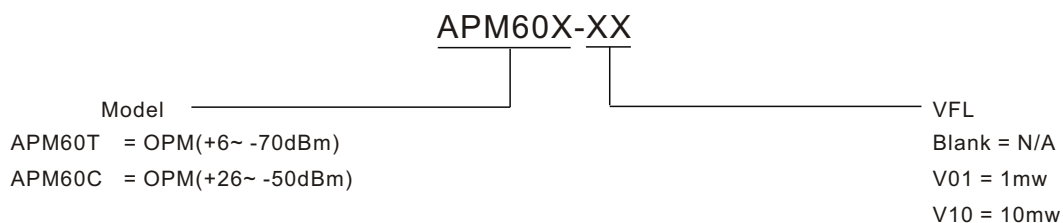

Example: APM60T, APM60T-V10